


CobiCabling CAT 5e U/UTP Outdoor Cable PE 200MHz, 4x2xAWG24

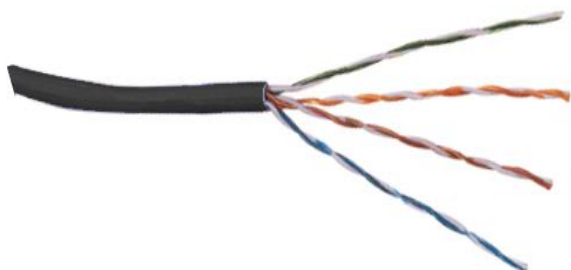

PRODUCT DESCRIPTION

CobiCabling Category 5e outdoor cable is manufactured and tested to exceed EN 50173-1:2018-07, EN 50173-1:2011, ISO/IEC 11801 Edition 2.2 with exceptional margin on all parameters. Our Cat5e cable is designed for high speed LAN applications including Gigabit Ethernet, combined with our patch panels and connectivity product it forms a truly reliable foundation for any network.

Features:

200MHz working frequency (CAT5e, Class D)

Sequential metre markings

Outdoor cable with PE outer sheath

CONFORMS TO:

- EN 50173-1:2018-07
- ISO/IEC 11801 Edition 2.2
- ANSI/TIA-568-C.0/C.1/C.2
- IEC 60754-2

TYPICAL APPLICATIONS:

- 100Base-TX Fast Ethernet;
- 1000Base-T Gigabit Ethernet;
- Composite Video;
- ATM-25/52/155 Mbit/s, Token Ring

Technical spec	Details
Frequency	Tested up to 200MHz
Outer sheath	PE - black
Category compliance	5e
Shield	U/UTP
Metre mark	From 500 to 0 (every 1m)
NVP	69% (0,69)
Overall diameter	5,2mm (±0,2mm)
Conductor diameter	24AWG
Euroclass	Fca
Temperature range	During installation -10°C to +50°C, After installation -30°C to +80°C

Part numbers	Name
C13-5900	CobiCabling CAT 5e U/UTP Outdoor Cable PE 200MHz